

MAXPRO[®] VMS

Video Management System

Honeywell's MAXPRO VMS (video management system) controls multiple sources of video subsystems to collect, manage and present video in a clear and concise manner.

MAXPRO VMS intelligently determines the capabilities of each subsystem across various sites, allowing video management of analog or digital video devices through a unified configuration and viewer. The subsystems can be analog matrix switches or digital/network video recorders allowing both analog or digital input to be viewed on an analog or digital monitor. Users can benefit from using traditional analog systems and IP-network systems at the same time to ensure maximum use of their initial investments. These subsystems range from Honeywell matrix switchers, DVR/NVRs and 3rd party systems. MAXPRO VMS supports emerging technologies in the industry, like 4K resolution, H.265 smart video compression codec, multi-imager cameras and fisheye cameras. Customers can fully utilize the advantages of superb video quality with 4 times the details over 1080p HD, 30%~50% less storage expense (when compared to H.264 compression), and seamless 180° and 360° surrounding surveillance. Furthermore, MAXPRO supports the native integration with Honeywell eQuIP[®] series IP cameras. The advanced camera features, like "Click & drag" 3D PTZ control, license plate recognition, intelligence events and bounding boxes on objects detected by specific video analytics, help surveillance operators to efficiently protect people, property and services.

MAXPRO has database redundant and 1+1/N+M NVR failover features for unforeseen/maintenance scenarios in enterprise and critical infrastructure applications. Once there is a failure on NVR equipment, system database or network, the redundant and failover feature can continue to support the system functions with minimal interruption. Incidents will be reported in a system log for future auditing and reporting.

Control of MAXPRO VMS can be through a traditional joystick controller, mouse or even through third party interface. The extremely powerful rules engine (Macro's) allows customization of the system to respond and control in the best possible manner for the application.

MARKET OPPORTUNITIES

MAXPRO VMS is ideal for facilities requiring at-risk critical infrastructure protection such as airports, seaports, large multi-site commercial buildings, casinos, and other high-profile facilities. It is the perfect client-server video management solution for locations requiring the use of both digital and analog technologies.



MAXPRO VMS Client Viewer 2x2



MAXPRO VMS Security Console

With MAXPRO VMS R600 release, a brand new Security Console web client is introduced, offering intuitive map navigation across sites, buildings and floors, and camera live view pop-up, instant playback and alarm indication on maps, which enables customers to obtain situational awareness and manage their facility efficiently.

MAXPRO VMS is highly scalable so users can easily expand their video surveillance network from small to medium single instances to enterprise level supporting thousands of devices. Additionally, MAXPRO VMS includes integration with Honeywell's Pro-Watch[®] security management system, Active Alert[®] and People Counter video analytics, as well as other Honeywell products and solutions. The feature-rich user interface truly offers a unified management platform across many disparate systems to further embody Honeywell's concept of "Learn One, Know Them All."

Honeywell

MAXPRO® VMS

Video Management System

FEATURES

Scalable Security System for Flexible Deployment

- A single MAXPRO Server can support numerous recording sub systems (NVR/DVRs)
- Distributed architecture in the form of multiple MAXPRO servers in a Parent-Child topology facilitates "Enterprise" style deployment, where Child VMS server Users & Roles, Workstations, Sites, and Partitions can be easily added to Parent VMS server through advanced discovery.

Open Integrated Platform for End-to-End Solution

- Auto-discovery of cameras connected to supported recorders
- Honeywell H.265, multi-imager and explosion-proof camera support
- Support for equiP camera multicast stream reduces camera loading and network loading with live view on multiple clients
- Integration with Honeywell Pro-Watch® Access Control Systems providing an integrated Access Control, Intrusion and Video solution

Redundant Server and Recorder Failover for 24/7 Operational Continuity

- Redundant server option increases system reliability.
- 1+1/N+M MAXPRO NVR failover and fallback automatically or manually. View and playback on one client panel.

Smart Search, Playback and Clip Export for Efficient Forensic Investigation

- Ability to investigate events and alarms by simultaneously viewing alarm video at various stages. For every alarm, users can view the video captured during pre-alarm, on-alarm, post-alarm, and also view live video from the camera which triggered the alarm through a single 2x2 salvo.
- Commentable bookmarks allow users to tag scenes of interest in the timeline to easily return to the scene with multiple cameras' views.
- Search and find video through event view or timeline. Preview search allows viewing a snapshot at various times to quickly narrow the scene of interest.

- Smooth reverse and Synchronous playback across MAXPRO NVRs for efficient cross-site investigation
- Incident management mode allows creating a package of clips multiple cameras at different times that can be played back sequentially.

Intelligent Analytics for Proactive Threat Detection and Operation Efficiency Boost

- Intelligent events from cameras can be viewed at the alarm panel and trigger event recording on MAXPRO NVRs for further investigation
- Annotation with bounding boxes on objects detected by IntrusionTrace and LoiterTrace from equiP camera & ADPRO NVR in both live view and playback for visual notification and verification
- Honeywell Video Analytics (HVA) integration with automatic camera stream selection for optimal performance
- License Plate Recognition event management with rich details and easy report generation for efficient vehicle management with Honeywell VehicleTrace™ enabled cameras

Powerful Desktop Clients for Enhanced Monitoring and Fast Response

- Viewing, creating, saving and naming salvos with up to 8x8 cameras each under My Salvos or Shared Salvos. Support for aspect ratio - 16:9, 4:3 and Stretched for video salvos.
- Surrounding cameras mode with presets, makes following subjects of interest simple and efficient by allowing the nearest camera of interest to be immediately in view
- Quick and responsive alarm actions can be initiated from the preview pane options
- Innovative "One-Click" or "Mouse Drag" 3D PTZ control experience that does away with legacy PTZ controls of continuous clicking
- 360° de-warping "spreads" the distorted fisheye image into natural panoramic and/or multiple tile views. Operators can view and focus on zones of interest on live and recorded video.
- Enriched video viewing experience through intuitive video rendering engine optimizes CPU utilization by altering the video frame rate for low bandwidth throttling.
- GPU rendering support for H.264 and H.265 decoding up to 60 frames per second (1080p

camera) with smooth display on 4K monitors reduces the number of workstations needed for monitoring large sites with 30+ cameras

- Control any analog or digital monitor from a single workstation or joystick keyboard. Allows the system to be used as a true analog and digital matrix.
- Monitor control allows controlling all monitors from a single client (Monitor Wall control)
- Remote monitor mode allows sharing and controlling a remote monitor while still viewing locally

Intuitive Graphical User Interface for Efficient Site Management

- Feature-rich and user-friendly Client interface to view video from numerous different recorders from a single point
 - Web client option for simple, no license, no software install applications
 - Operators can log on using their local language and the built-in messaging system allows operators to share video scenes via instant messages
 - Role-based operator privileges
 - An extremely powerful macro programming language is available to fully customize actions based on events
 - Support for Active Directory user authentication
 - Web-based maps with drag-and-drop camera setup, easy cross-site navigation and HTML5 live video pop-up and instant playback, allow quick situational response.
- #### **Effective Privacy Protection Options for Data Privacy Compliance**
- Body pixilation and blurring in live view to protect customer and employee privacy from abuse of surveillance data;
 - 4-Eye dual user authentication for playback of original video record, for example, with simultaneous logon from two groups of managers and worker' council representatives.

ARCHITECTURE


MAXPRO VMS is based on client-server architecture for maximum flexibility, customization and integration. It offers one-click migration support from analog matrix systems. The MAXPRO VMS client enables the monitoring of sites and the configuration of video devices such as cameras, monitors, keyboards, etc. The MAXPRO VMS server consists of the MAXPRO VMS framework controller and database, and other core components.

Cyber Security Features

- Enhanced password security – non-recoverable passwords, enforcing complex passwords, password expiry, and no default passwords
- Addressed Unauthenticated/Unauthorized channels
- Secured firewall configuration
- Secured Web client – enabled HTTPS and TLS 1.2, and protection from CSRF and XSS attacks
- Restricted folder and Registry access to operators
- Secured Assemblies – Digital signing
- Secure communication with the new equiP Cameras using Honeywell proprietary protocol and 30 Series camera with TLS 1.2 encrypted video streams
- Support for Digest Authentication in multicast stream between camera and MAXPRO VMS client

MAXPRO® VMS

Video Management System

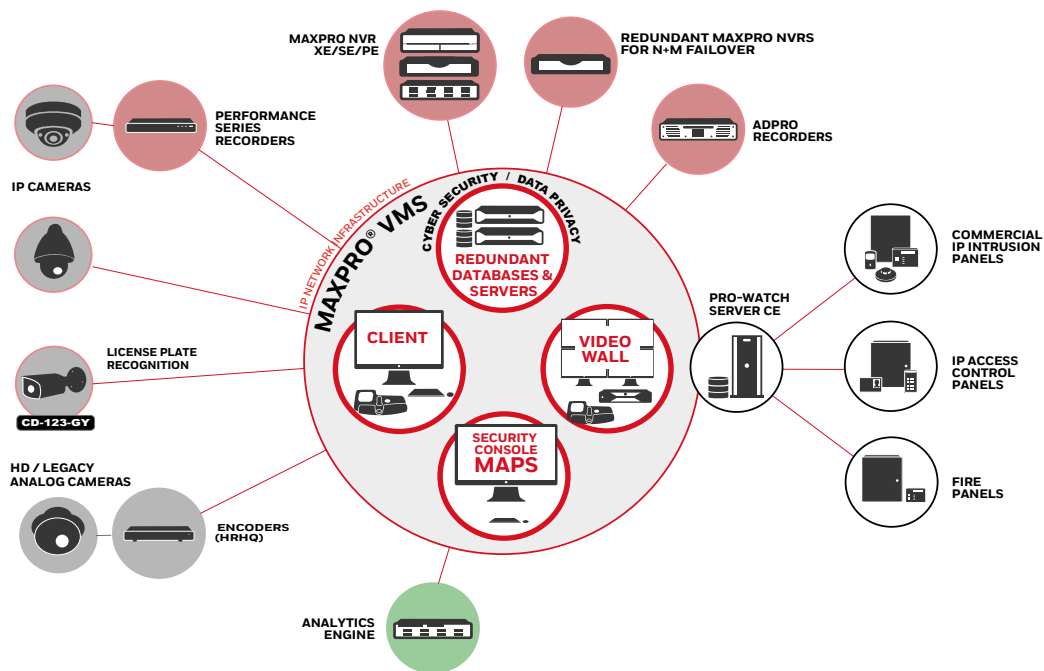

This diagram illustrates the MAXPRO VMS architecture and associated components.

RECOMMENDED HARDWARE SPECIFICATIONS

MAXPRO VMS MINIMUM SERVER SPECS	STANDARD SPEC UP TO 5 CLIENTS	PERFORMANCE SPEC 10 CLIENTS	PREMIUM SPEC 25 CLIENTS AND GREATER
PROCESSOR	Single Intel® Quad Core Xeon E3 1225V3 3.2 GHz S1150	Single Intel® Quad Core Xeon E-2134 3.5 GHz	Dual Intel® 8 Core Xeon's Silver 4110 2.1 GHz
OPERATING SYSTEM	Microsoft Windows® Server 2019 64-bit, Server 2016 64-bit or Server 2012 STD 64-bit		
COMPUTER TYPE	Server – dual power supply suggested		
SYSTEM MEMORY (RAM)	8 GB	16 GB	32 GB
DVD DRIVE	DVD +/- RW		
DISK	Two separate hard drives or two sets of RAID arrays		
	Disk/RAID set 1 utilizes 10K RPM SATA 150 GB or 10K-15K RPM SCSI 146 GB for Windows operating system, MAXPRO VMS Server Software, and Microsoft SQL Server software		
	Disk/RAID set 2 utilizes 10K RPM SATA 150 GB or 10K-15K RPM SCSI 146 GB for MAXPRO VMS database files and Microsoft SQL Server database files		
	Note: If fault tolerance is required, RAID set 1 is RAID 1, 10 or 0+1 and RAID set 2 is RAID 10 or 0+1		
VIDEO ADAPTER	Display Adapter with Video resolution 1024x768 pixels; 32-bit color or higher		
SERIAL PORTS	Only required if serial device are to be connected - Suggested 8 Port MOXA PCI-e serial RS232		
NETWORK CONNECTION	1 Gbit/sec or greater		
VIRTUAL ENVIRONMENT	VM Ware ESXi version 5.5, vSphere and Hyper-V		

MAXPRO VMS MINIMUM WORKSTATION SPECS	2 MONITOR WORKSTATION	4 MONITOR WORKSTATION
PROCESSOR	Intel Core i7-8700, 3.2 GHz	
OPERATING SYSTEM	Microsoft Windows® 10 Enterprise 64-bit	
COMPUTER TYPE	Workstation	
SYSTEM MEMORY (RAM)	16 GB	
DVD DRIVE	DVD +/- RW	
DISK	500 GB 7200RPM SATA3	
VIDEO ADAPTER	Integrated Intel UHD graphics 630	Integrated Intel UHD graphics 630 and NVIDIA Quadro
NETWORK CONNECTION	1 Gbit/sec or greater	P620
VIRTUAL ENVIRONMENT	Virtual environment not supported on Client machines	

For detailed recorder versions, hardware and software compatibility please check the following link
<https://Hwll.co/hota>

MAXPRO® VMS

Video Management System

ORDERING

MAXPRO VMS - PART NUMBERS AND LICENSING	
MAXPRO VMS - BASE SOFTWARE AND LICENSES	
HNMSWVMS	VMS Base Software includes: MAXPRO VMS, SQL 2014 Express, includes Licenses for One (1) MAXPRO VIEW Client, with 64-channel interface to MAXPRO NVR Series, IP Engine, Enterprise NVR, MAXPRO-Net and VideoBloX Matrix Switch.
SSAHNMVMS	Annual software support agreement - MAXPRO VMS Base software
SSAHNMRED	Annual software support agreement - redundant MAXPRO VMS software
MAXPRO CLIENT LICENSE - ONE LICENSE PER CONNECTED WORKSTATION (CLIENT APPLICATION CAN RUN MULTIPLE INSTANCES)	
HNMSWCL	MAXPRO View - Single Client License
HN64	Additional 64 Base Channels
HN128	Additional 128 Base Channels
HN192	Additional 192 Base Channels
HN256	Additional 256 Base Channels
HN384	Additional 384 Base Channels
HN448	Additional 448 Base Channels
HN512	Additional 512 Base Channels
MAXPRO VMS WITH ACTIVE ALERT® VIDEO ANALYTICS - ONE LICENSE PER ANALYTICS CHANNEL	
HNMHVAB	HVA - Base Package
HNMHVAS	HVA - Standard Package
HNMHVAP	HVA - Premium Package
HNMHVASI	HVA - Smart Impressions
HNMHVAPC	HVA - People Counter
MAXPRO VMS SERVER FAILOVER SOLUTION	
NFHALAN	Neverfail Server Failover Management

MAXPRO VMS LITE - PART NUMBERS & LICENSING	
MAXPRO VMS LITE - BASE SOFTWARE AND LICENSES	
HNMSWVMSLT	MAXPRO VMS Lite Software includes: MAXPRO VMS, SQL 2014 Express, includes Licenses for One (1) MAXPRO VIEW Client, with 64-channel interface to MAXPRO NVR Series, IP Engine, Enterprise NVR, MAXPRO-Net and VideoBloX Matrix Switch. Expandable up to a maximum of three Clients and 128 Channels. No third party adapter support. (Add "-B" to P/N for redundant server licenses)
SSAHNMVMSL	Annual software support agreement - MAXPRO VMS Lite software
MAXPRO VMS LITE BASE CHANNEL LICENSE - ONE LICENSE PER VIDEO INPUT	
HN64	Additional 64 Base Channels
MAXPRO VMS LITE UPGRADE	
HNMUG	Upgrade MAXPRO VMS Lite to MAXPRO VMS
MAXPRO VMS REDUNDANCY	
HNMSWRED	Maxpro Redundant System

MAXPRO VMS VERSION RECORDER COMPATIBILITY

RECORDER MODELS	R600 BXXX CURRENT RELEASE	R560 B573 PRIOR RELEASE	R500 B512 PRIOR RELEASE	R470 B46 PRIOR RELEASE	R450 B455 PRIOR RELEASE	R410 B424 PRIOR RELEASE	R310 B326 PRIOR RELEASE
MAXPRO NVR	✓	✓	✓	✓	✓	✓	✓
MAXPRO VMS (VMS IN VMS)	✓	✓	✓	✓	✓	✓	✓
ENTERPRISE	✓	✓	✓	✓	✓	✓	✓
IP ENGINE	✗	✗	✗	✗	✗	✗	✓
RAPIDEYE™	✗	✗	✓	✓	✓	✓	✓
FUSION	✗	✗	✓	✓	✓	✓	✓
HEN*2 EMBEDDED NVR	✓	✓	✓	✓	✓	✗	✗
HEN*3 4K/8MP EMBEDDED NVR	✓	✓	✓	✓	✗	✗	✗
HEN*4 4K/12MP EMBEDDED NVR	✓	✓	✓	✓	✗	✗	✗
HRDP H.264	✗	✗	✓	✓	✓	✓	✓
HRDP MPEG4	✗	✗	✓	✓	✓	✓	✓
ADPRO IFT, IFT-E, FASTTRACE 2E, IFT GATEWAY	✓	✓	✗	✗	✗	✗	✗

✓ Supported ✗ Not Supported

For more information,
<https://honeywellbuildings.in>
 Call: 1-800-103-0339
 Email: HBT-Indiabuildings@honeywell.com

Honeywell HBT India Buildings
 Unitech Trade Center, 5th Floor, Sector-43,
 Block C, Sushant Lok Phase - I,
 Gurgaon - 122 002

www.honeywell.com

© 2020 Honeywell International Inc.

**MAXPRO®
VMS**

Honeywell